


MRB SCIENTIFIC LTD *A fresh approach to gas sensing.*

S+4DT Miniature Dual CO/H₂S Sensor

Performance Characteristics	
Output signal	CO 70 ± 15 nA / ppm
	H ₂ S 750 ± 280 nA/ppm
Typical Baseline Range (pure air)	CO -2 to +3.5 ppm equivalent
	H ₂ S -0.5 to +0.5 ppm equivalent
T90 Response Time	<35 seconds
Nominal Range	CO 0 - 500 ppm
	H ₂ S 0 - 200 ppm
Maximum Overload	CO 1500 ppm
	H ₂ S 500 ppm
Expected Operating Life	36 months in air
Resolution	1 ppm
Temperature Range	-20°C to + 50°C
Pressure Range	Atmospheric ± 10%
Long Term Output Drift	< 5% signal loss/year
Repeatability	<3% of signal
Recommended Load Resistor	10 ohms
Output Linearity	Linear

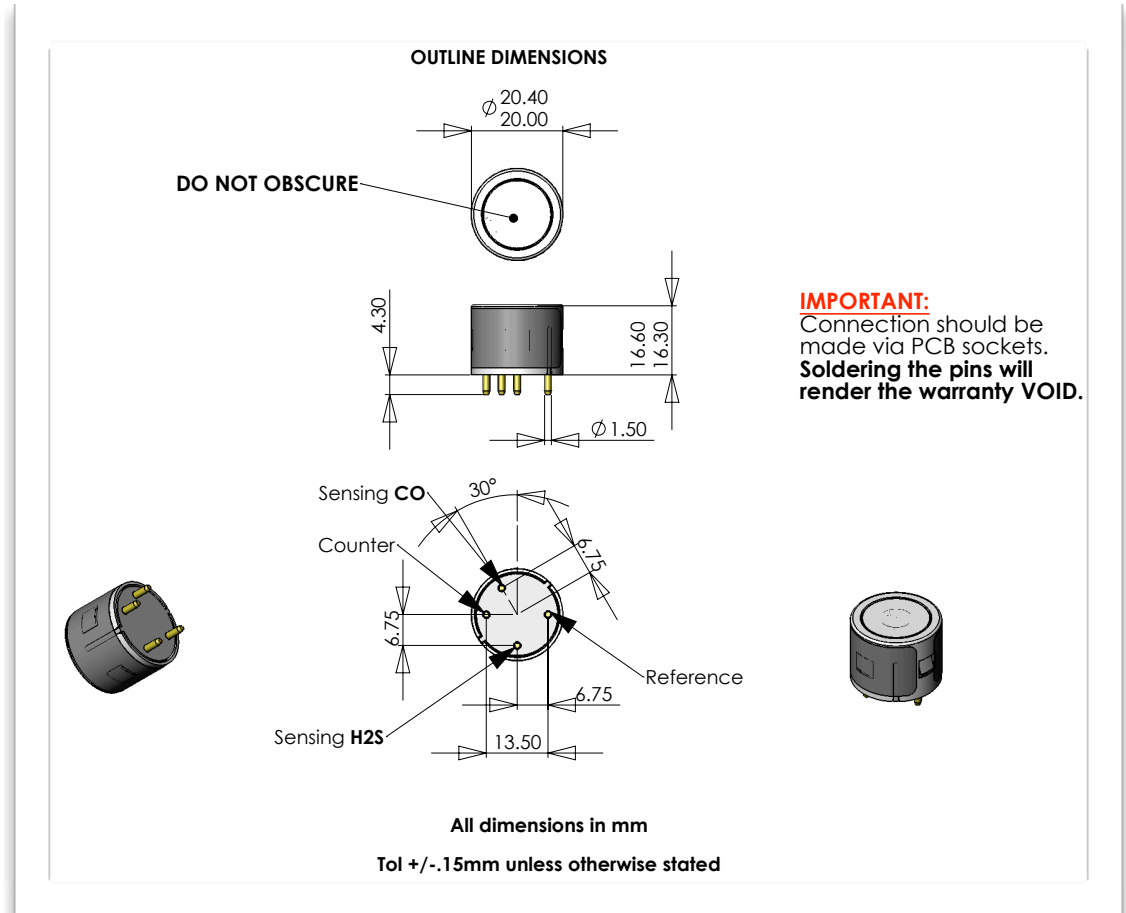

MRB SCIENTIFIC LTD, UNIT 25 THE OAKWOOD CENTRE, DOWNLEY ROAD, HAVANT, PO9 2NP, UK

Cross -Sensitivity Data			
GAS	CONC.	S+4DT on CO elec.	S+4DT on H ₂ S elec.
Carbon Monoxide	200 ppm	200 ppm	<6 ppm
Hydrogen Sulphide	15 ppm	<3 ppm	15 ppm
Sulphur dioxide	5 ppm	<1 ppm	<1 ppm
Hydrogen	100 ppm	<30 ppm	<0.5 ppm
Nitric Oxide	35 ppm	<0.2 ppm	<1 ppm
Nitrogen dioxide	5 ppm	<1 ppm	<0.5 ppm

The cross-sensitivity values quoted are based on tests conducted on a small number of sensors, they are intended to indicate sensor response to gases other than the target gas. Sensors may behave differently with changes in ambient conditions and any batch may show significant variation from the values quoted.

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement MRB SCIENTIFIC Limited reserves the right to make product changes without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale. The products are always subject to a program of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of MRB SCIENTIFIC Limited, we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application. Performance characteristics on this data sheet outline the performance of newly supplied sensors. Output signal can drift below the lower limit over time.

MRB SCIENTIFIC LTD, UNIT 25 THE OAKWOOD CENTRE, DOWNLEY ROAD, HAVANT, PO9 2NP, UK